



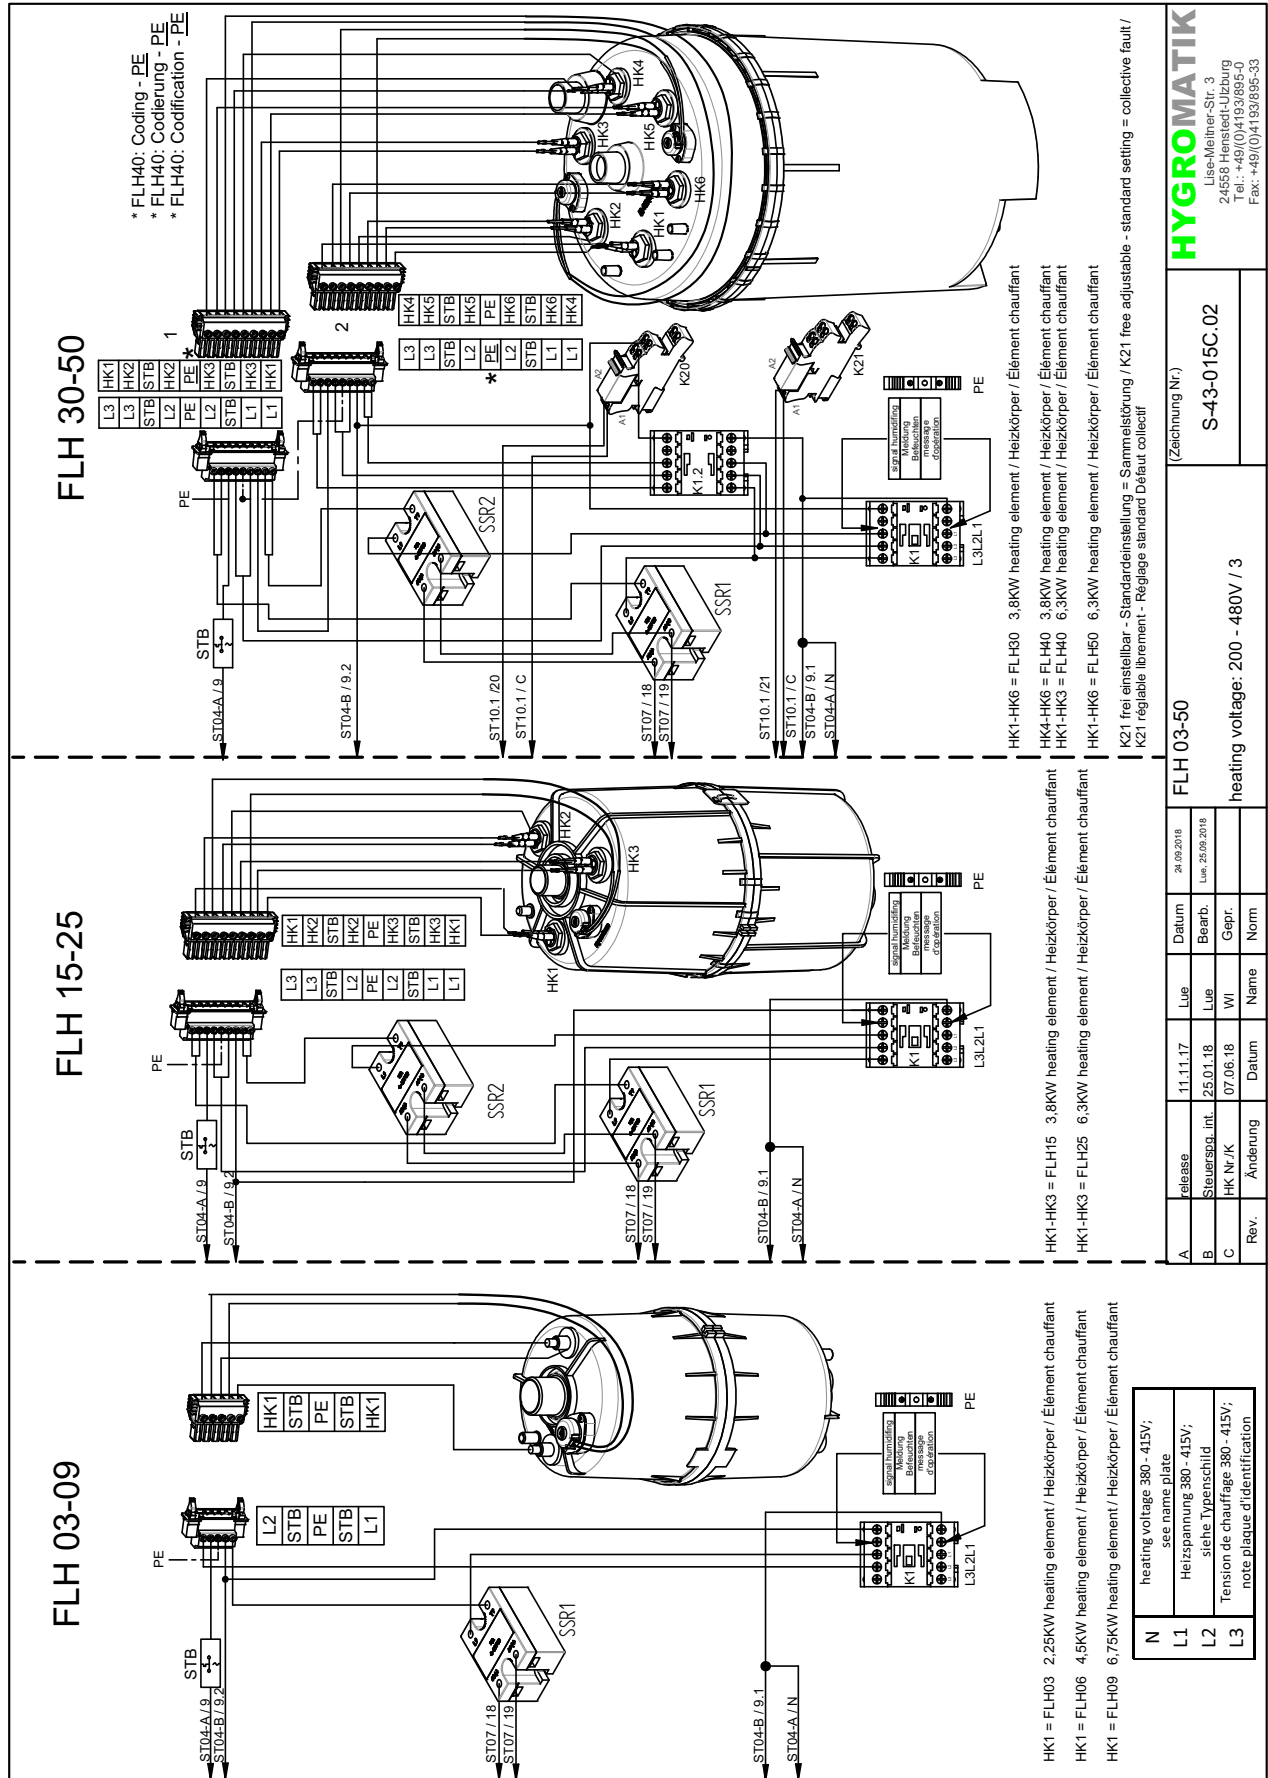

N	heating voltage 380 - 415V; see name plate
L1	Heizspannung 380 - 415V; siehe Typenschild
L2	Tension de chauffe 380 - 415V; note plaque d'identification
L3	

SPA Lite Option 230V


without relay board
ohne Relais Platine
sans platine relais

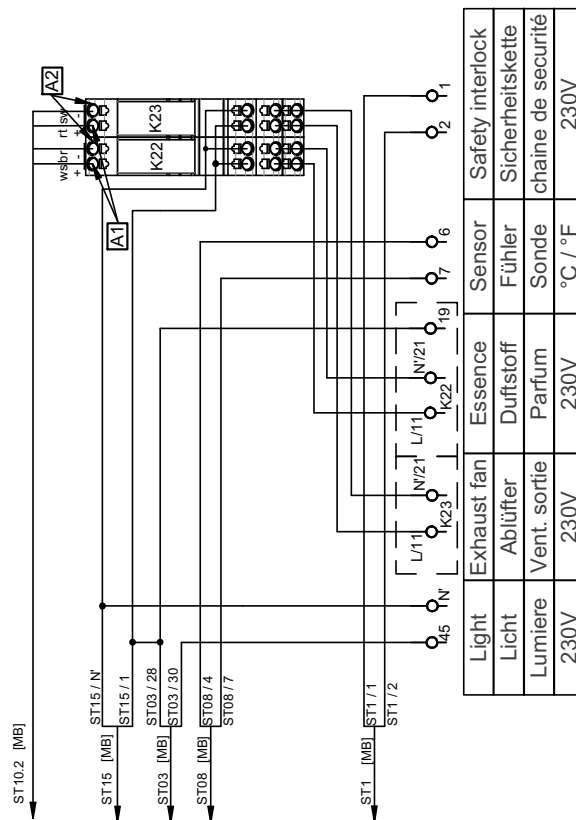

Light	Exhaust fan	Essence	Safety interlock
Licht	Ablüfter	Duftstoff	Sicherheitskette
Lumière	Vent. sortie	Parfum	chaîne de sécurité
230V	230V	230V	230V

SPA Option 230V

with relay board
mit Relais Platine
avec platine relais

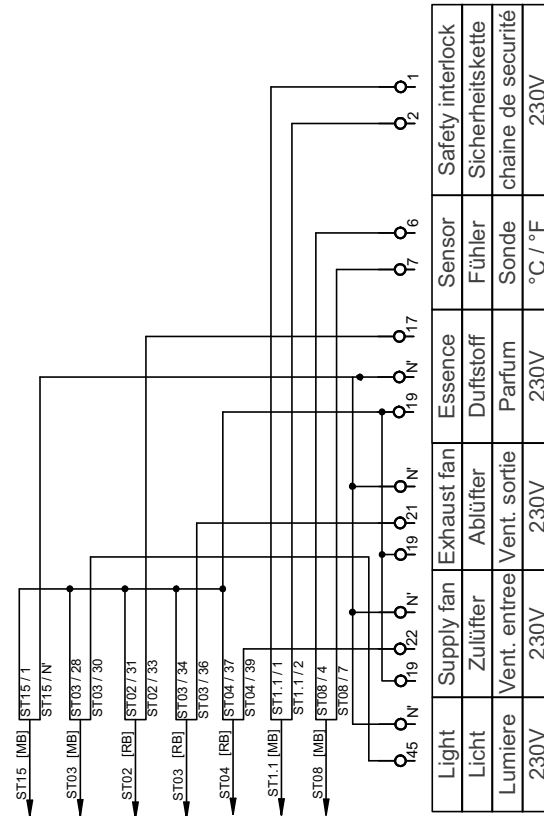

Light	Supply fan	Exhaust fan	Essence	Sensor	Safety interlock
Licht	Zulüfter	Ablüfter	Duftstoff	Fühler	Sicherheitskette
Lumière	Vent. entree	Vent. sortie	Parfum	Sonde	chaîne de sécurité
230V	230V	230V	230V	°C / °F	230V

HYGROMATIK		S-43-015B.03		SPA Option		control voltage: 220-240V/1/N		Zeichnung Nr.:	
A	release	21.06.18	WI	Datum	24.09.2018				
B	Terminal 19	24.09.18	Lue	Bearb.	Lue	25.09.2018			
				Gepr.					
Rev.	Änderung	Datum	Name	Norm					